
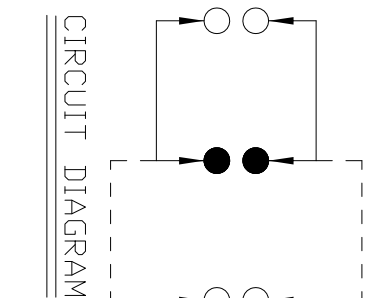
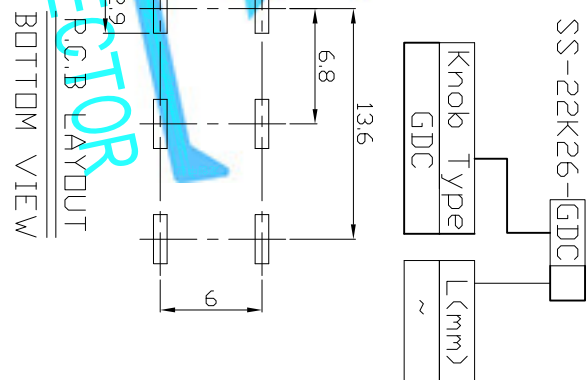
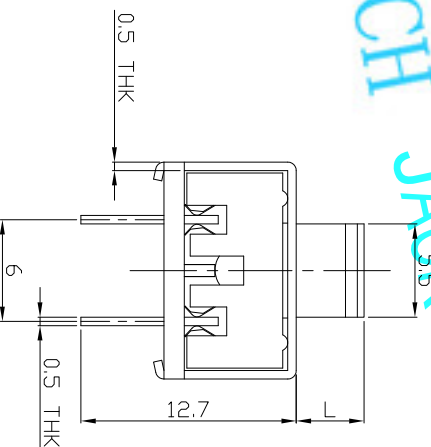


DIMENSIONS

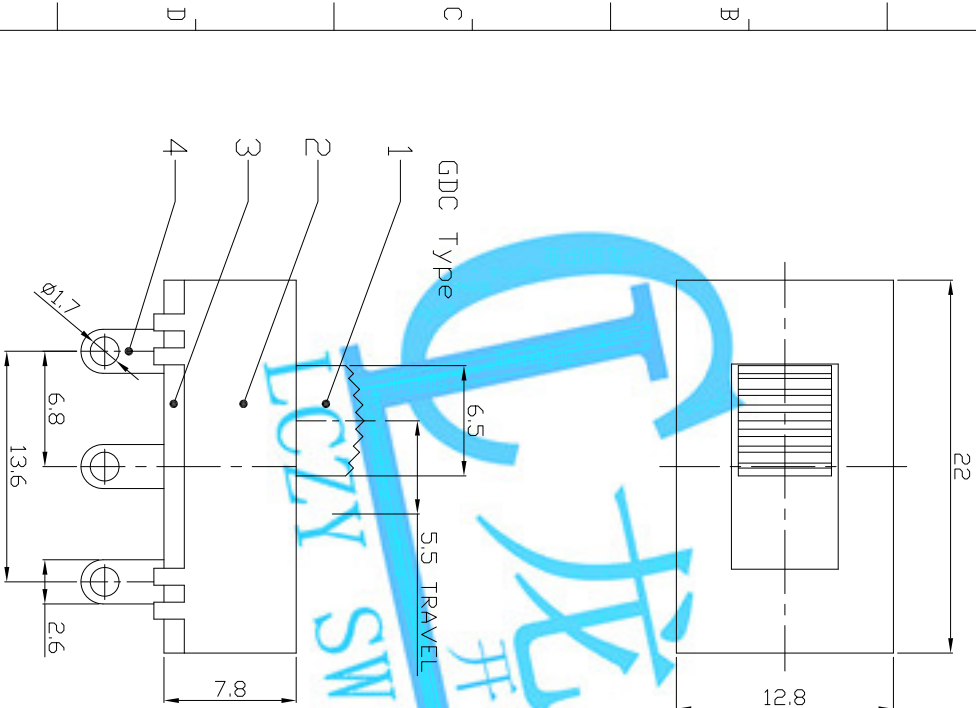

MODEL CODE

SS-22K26-GDC

ELECTRO-MECHANICAL CHARACTERISTICS

RATING	0.3A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	5.5mm
OPERATING FORCE	300±100gf
OPERATING LIFE(cycles)	10,000

8	CONTACT CLIP	PBS STRIP	2	Ag PLATED	WITHIN 1.5mm: ±0.1mm	UNITS	mm
7	POSITION PLATE	STEEL STRIP	1	Ni PLATED	OVER 1.5mm: ±0.2mm	MAT'L	SEE NOTE
6	STEEL BALL	STEEL	1	NATURAL		FINISH	SEE NOTE
5	SPRING	STEEL WIRE	1	NATURAL		SEE NOTE	
4	TERMINAL	BRASS STRIP	6	Ag PLATED		DR:	2015/09/04
3	BASE	PHENOLIC RESIN	1	NATURAL		CHKD:	2015/09/04
2	FRAME	STEEL STRIP	1	Ni PLATED		APPD:	
1	KNDB	POM	1	BLACK			
ND.	PARTS	MATERIAL	Q'TY	FINISHING			

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TITLE: SLIDE SWITCH / VERTICAL
PART NO.: SS-22K26

DWG NO.: ADL-22K26

SCALE: 1/1
REV. A
CUSTOMER DRAWING

REV.	ECN.	NO.	APPD.