



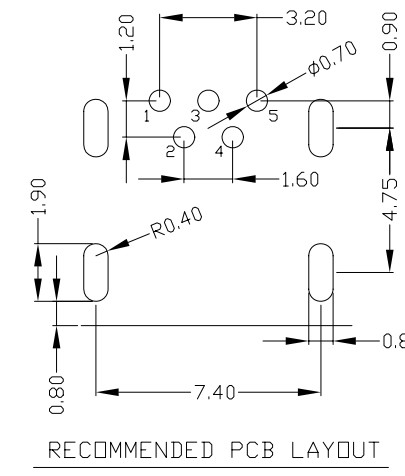

RoHS
Compliant
2002/95/EC

| REV. | ECN. | NO. | APPD. |
|------|------|-----|-------|
| | | | |
| | | | |

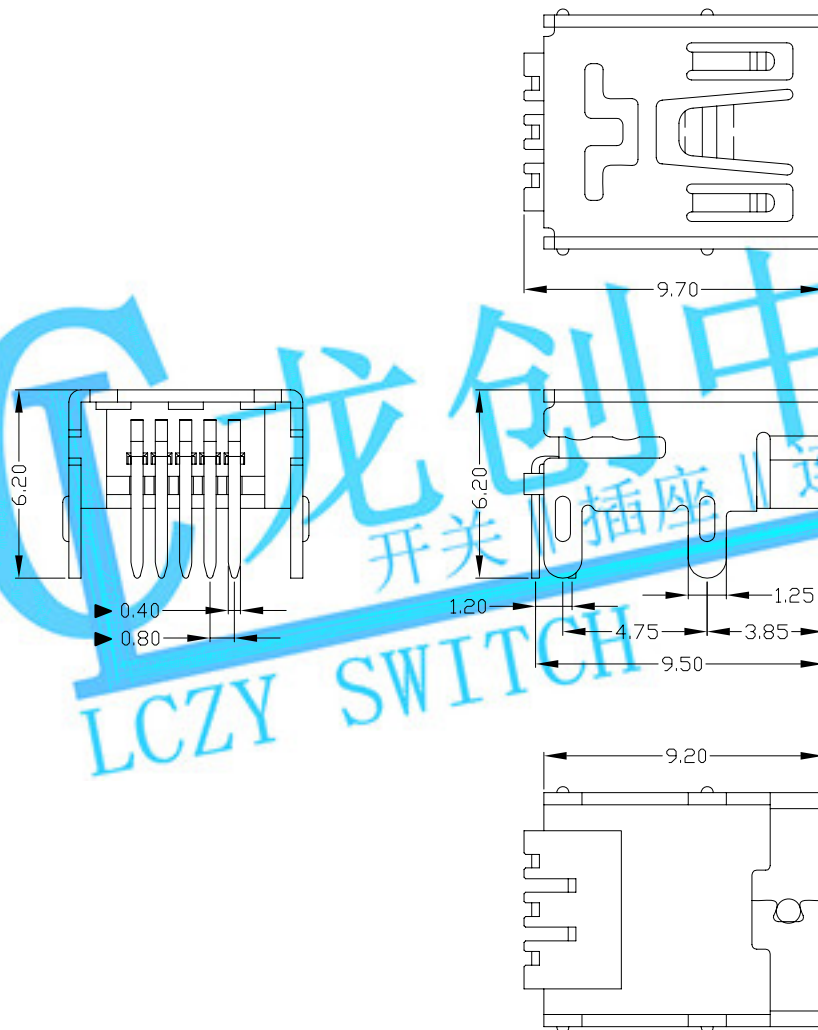

龙城创中业
开关插座连接器
LCZY SWITCH

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
 - INSULATION RESISTANCE: 100M Ω MIN;
 - CONTACT RESISTANCE: 50m Ω MAX;
 - WITHSTANDING VOLTAGE: 300V AC;
 - OPERATING TEMPERATURE:-55°C TO +85°C.
 - Mechanical:
 - Mating Force: 30N MAX
 - Unmating Force: 7N MIN.
 - DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.
MUBF-05*N-4BR84

1:Au 1U*
6:Au 30U*

W:WHITE
B:BLACK
1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

| NO | PARTS | MATERIAL | QTY | FINISHING | UNITS | mm | LONGCHUANG ZHONGYE (HK)CO.,LIMITED | | | | | |
|----|----------|--------------|-----|-----------------|---|---------------|------------------------------------|--|-----|-----------------------------------|---|--|
| 3 | HOUSING | LCP | 1 | UL94V-0 | X. ± 0.35 | X.* $\pm 2^*$ | MAT'L | TITLE: MINTI USB 5P/F 90° B型 (四脚加长0.4) | | PART NO.: MUBF-05*N-4BR84 | | |
| 2 | SHELL | COPPER ALLOY | 1 | PLATED NICKEL | .X ± 0.3 | .X* $\pm 1^*$ | SEE NOTE | DR: gan 2012/7/02 | | DWG NO.: AII-R84 | | |
| 1 | TERMINAL | COPPER ALLOY | 5 | PLATED GOLD/TIN | .XXX ± 0.15 | .XXX* | FINISH | CHKD: gan 2012/7/02 | | SCALE SHEET REV. CUSTOMER DRAWING | | |
| | | | | | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC. | | Q'TY | APPD: | 1:1 | 1/1 | B | |