



RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.





A

B


C

D

E

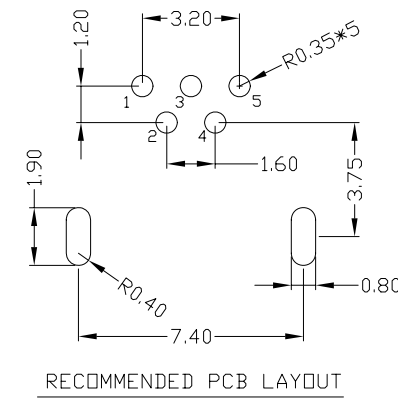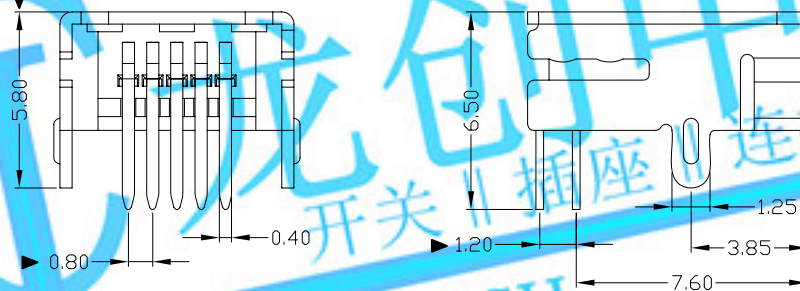

开关插座连接器
LCZY SWITCH



NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 50mΩ MAX;
 - WITHSTANDING VOLTAGE: 300V AC;
 - OPERATING TEMPERATURE:-55°C TO +85°C.
- Mechanical:
 - Mating Force: 30N MAX
 - Unmating Force: 7N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUBF-05*N-4BR85

1:W:WHITE
2:B:BLACK
1:PA6T
2:PA6T
3:PA9T
4:LCP

1:1Au 1U*
6:1Au 30U*

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED						
3	HOUSING	LCP	1	UL94V-0	X. ±0.35	X.* ±2*	MAT'L	TITLE: MINI USB 5P/F 90° B型两脚 (胶芯缩短0.7)		PART NO.: MUBF-05*N-4BR85			
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.X ±0.3	.X* ±1*							SEE NOTE
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN	.XX ±0.25	.XX*	FINISH	DR: gan 2012/7/02		DWG NO.: AII-R85			
					.XXX ±0.15	.XXX*		SEE NOTE	CHKD: gan 2012/7/02				
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		Q'TY	APPD: gan 2012/7/02		SCALE	SHEET	REV.	CUSTOMER DRAWING
								1:1	1/1	B			