

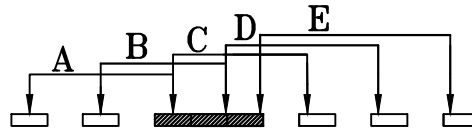


RoHS

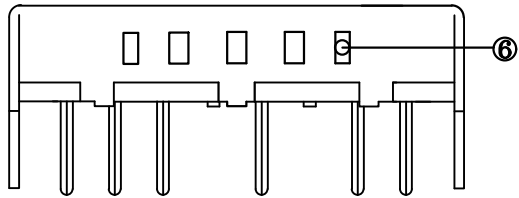

SCHEMATIC (SHORTING)

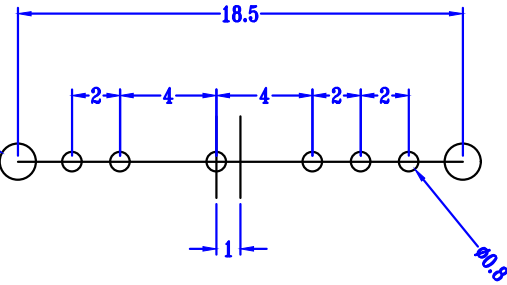





PCB HOLE LAYOUT

Height(高度) :

NO.1	
PART NO	L
	X

Main technical specifications:

Rated load(额定负荷):	DC 50V 0.3A		
Contact impedance(接触阻抗):	100m MAX		
Insulation impedance(绝缘阻抗):	100M MIN		
TIMING	NON-SHORTING		
OPERATING LIFE(电气寿命):	100,000 cycles		
Usage temperature(使用温度):	-25 to 85		
CIRCUIT	1P5T		
Trip(行程):	2 ± 0.2mm		
Operating force(操作力):	1	2	
	3	4	350 ± 100g
	5	6	

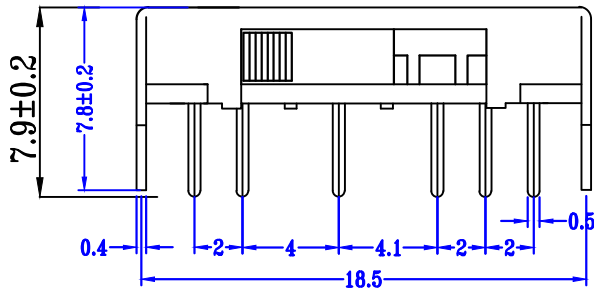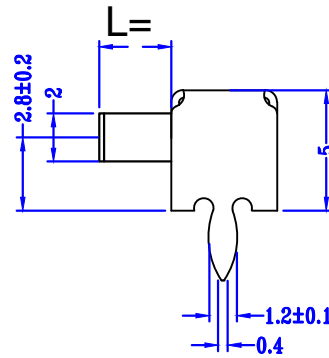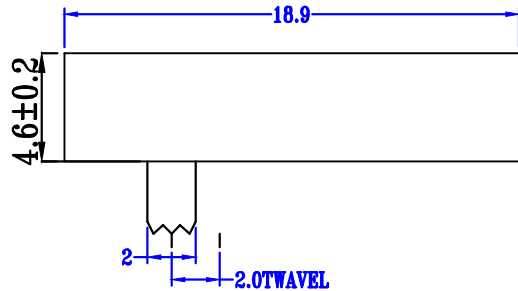

public errand(公差) : ±0.2mm unit(单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		SWITCH		DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.		SK-15D01		CHECK	Z.LIU	REV.	A1
UNIT :	TOLERANCE	OTHERWISE	UP TO 5	±0.2	ANGLE	DATE	SK-09-2019
			ABOVE 5~30	±0.3			
mm			ABOVE 30	±0.5	0°±3'	PAGE	1 OF 1
			ANGLE	±3'	SCALE	2:1	

SK-15D01-

F

E

D

B

A