




RoHS

MODEL CODE

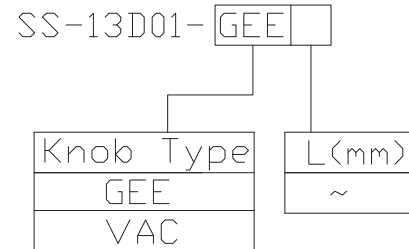

CIRCUIT DIAGRAM

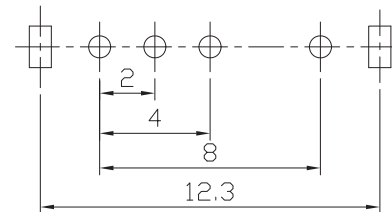

Height(高度) :

| | |
|---------|---|
| NO.1 | |
| PART NO | L |
| | X |

Main technical specifications:

| | | | | | | | | | | |
|-----------------------------|--|------------|---|--|---|---|------------|---|---|--|
| Rated load(额定负荷): | DC 50V 0.3A | | | | | | | | | |
| Contact impedance(接触阻抗): | 100m MAX | | | | | | | | | |
| Insulation impedance(绝缘阻抗): | 100M MIN | | | | | | | | | |
| TIMING | NON-SHORTING | | | | | | | | | |
| OPERATING LIFE(电气寿命): | 100,000 cycles | | | | | | | | | |
| Usage temperature(使用温度): | -25 to 85 | | | | | | | | | |
| CIRCUIT | 1P3T | | | | | | | | | |
| Trip(行程): | 2 ± 0.2mm | | | | | | | | | |
| Operating force(操作力): | <table border="1"> <tr> <td>1</td> <td>2</td> <td></td> </tr> <tr> <td>3</td> <td>4</td> <td>250 ± 100g</td> </tr> <tr> <td>5</td> <td>6</td> <td></td> </tr> </table> | 1 | 2 | | 3 | 4 | 250 ± 100g | 5 | 6 | |
| 1 | 2 | | | | | | | | | |
| 3 | 4 | 250 ± 100g | | | | | | | | |
| 5 | 6 | | | | | | | | | |

public errand(公差) : ±0.2mm unit(单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

| | | | | | | | |
|-----------|------------------------|------------|------|---------|----------|---------|------------|
| PART NAME | | SWITCH | | DRAWING | G.L CHEN | DWG.No. | LCZY |
| PART NO. | | SS-13D01 | | CHECK | Z.LIU | REV. | A1 |
| UNIT : | TOLERANCE OTHERWISE | UP TO 5 | ±0.2 | ANGLE | APPROVAL | DATE | SS-09-2019 |
| | | ABOVE 5~30 | ±0.3 | | | SCALE | 2:1 |
| mm | | ABOVE 30 | ±0.5 | 0°±3' | | | |

SS-13D01-